



Improving Quality of Water from Murchison bay Using Clay from Chelel, Kapchorwa District, Uganda

Mukasa-Tebandeke I. Z.

Chemistry Dept, Faculty of Science, Kabale University, Uganda

Karume I.*

Chemistry Department, School of Physical Sciences, College of Natural Sciences, Makerere University, Uganda

Wasajja H. Z.

Departments of Earth Sciences, Wesleyan University, Connecticut USA

Nankinga R.

Departments of Earth Sciences, Wesleyan University, Connecticut USA

Abstract

Pollution resulting from increased human activities is threatening Lake Victoria, its effects are characterized by eutrophication, high turbidity, pH, iron(II) concentration and chemical oxygen demand (COD). In this study we have investigated the effect of Fe-montmorillonite clay from Chelel on turbidity, pH, concentration of iron, total suspended solids, total nutrients and COD of water sampled from Murchison bay watershed of Nakivubo channel south of Kampala. Varying amounts of clay powder was vigorously stirred with water samples for 5 minutes, filtered using Whatman paper at ambient temperatures. The optimum concentration of clay of 0.4 gL⁻¹ was found to produce 73.5±2% fall in COD indicating elimination of microbes and organic waste. The pH of water became 6.3±0.2 showing that impurities had been bound to clay. The TSS and nutrients in MB water also decreased greatly when clay was stirred with water at ambient temperatures. The available data can be relied on to recommend use of this clay in treatment of waste water and/or sewage from Kampala. Further studies on combined use of clays with alums, zeolites and/or lime need to be carried out.

Keywords: Pollution; Chemical oxygen demand; Clay; Nutrients; Adsorption.



CC BY: [Creative Commons Attribution License 4.0](https://creativecommons.org/licenses/by/4.0/)

1. Introduction

Water is the most precious resource on Earth. For the vast quantity of life to exist, access to fresh water is important. Although the water constitutes more than 70% of the Earth surface, only 2.5% of it is fresh. So protecting fresh water reserves around the world is very important. Sources of fresh water are easily contaminated to become undrinkable through pollution but the effects can be reversed through wastewater treatment [1]. Man's inventions and advancements, have come with pollution problems facing lakes, oceans and rivers; and the pollution problems can only be amended after exploring how they arose using naturally occurring materials [2]. Surface water pollution is the most visible form of water pollution where in plastics and garbage can be seen floating in lakes, rivers and oceans as was reported about river Lubigi [3]. Surface water pollution may include industrial accidents like oil spills and wastewater. Ground water pollution happens beneath the soil and is caused by highly toxic chemicals like pesticides or chemical spills. Depletion of oxygen in water is caused by microorganisms present in polluted water that consume biodegradable wastes [1].

A watershed is land that water flows across or through on its way to a common stream, lake or river. It can be a drainage basin or an area where all water flowing in goes to a common outlet like the estuary or reservoir. It consists of all surface as well as underground water and aquifers. Watersheds affect the quality of drinking and recreation water. Algae blooms from fertilizer runoff during rain harm the watershed health; but nutrients can be got rid of by using clays [4]. Unhealthy watersheds affect wildlife, is harmful to man, affects aquatic life, offsets changes in the ecosystems. It was further reported that heavy metals readily adsorb on clay particles thus alleviating pollution [5, 6]. Fresh water ecosystems are linked to watersheds tightly but this is influenced by man [7]. Watershed management unveils means to eliminate nutrients from water yet fish farming introduces fertilizers and nutrients for the rapid growth of fish. Addition of fertilizers promotes growth of aquatic weeds and algae; yet addition of clay to polluted water removed biological, organic and inorganic contaminants [8]. Elimination of algae and weeds necessitates use of algacides and herbicides, yet upon death, weeds and algae lie on bottom rot, releasing bound phosphorous and nitrogen back to water and creating anaerobic conditions at bottom of water mass. Lack of oxygen at base causes massive release of nitrogen and phosphorous from sediments and lowers quality of fresh water body. With more nitrogen and phosphorous in water, more algae and weeds grow abundantly and more poison is introduced. Herbicides and algacides wreck the quality of water. Natural processes oxygenate water bodies to bind

nitrogen and phosphorous to sediments at bottom of water mass and improve its quality. It was shown that clay adsorbents if stirred with polluted water flocculates nutrients, organic and inorganic pollutants [9].

As microorganism proliferate, toxins like ammonia increase. Nutrients pollution is brought about by presence of fertilizers and wastes allow algae and weeds to thrive thus hurting marine life [2]. Chemical pollution may result from plastics, home care and personal care products entering aquatic ecosystems. Phthalates present in plastics and cleaning agents are responsible for the flexibility of plastics and scents of soaps and air fresheners; and when disposed can contaminate water supplies and caused healthy problems. It was reported that organic pollutants readily adsorb on clay particles [10]; in much the same way as inorganic pollutants adsorb on bentonite [11] relieving pollution. Lake Victoria is Africa's largest freshwater resource covering about 68,800 km², shared between Uganda, Kenya and Tanzania. Its shoreline is composed of gulfs and bays that receive municipal and industrial wastes from adjacent urban centers. Murchison Bay is located at north-western part of Lake Victoria is affected by flooding and pollution [12, 13]. The pollutant loading in the Murchison bay, MB from streams has increased due to population growth, wetland encroachment, industrialization and paving of urban centers have led to flooding in the watershed. Increased agricultural practices around near rivers draining in MB have led to increased sediment and nutrient loading in the watershed and consequently to the lake through non-point source pollution [14]. Non-point pollution from catchments around MB was reported to be higher than that from point sources without quantification [15]. A comparison of the existing phosphorus, P in municipal and water runoff from agricultural fields revealed a 55% of the total P input to Lake Victoria [16]. Persistent outbreak of algal blooms in the MB and increased mass occurrences of cyanobacteria was reported to be caused by increased nutrient pollution [17, 18]. The quality of water in MB was shown to be influenced by nutrients loading in runoff from the catchment and population centers upstream [17, 19]. MB is heavily eutrophic, and nitrogen, N was reported to be the limiting nutrient [18, 20].

It was reported that when waters of the lake flow towards the gulf or bay and the reverse, the mixing that occurs results in nutrient recycling and water quality is lowered [21]. It was observed that the Winam or Nyanza Gulf (Kenya) in the north eastern part of Lake Victoria provided a net source of dissolved silica and total N and P to the gulf depending on the interchange through the Rusinga Channel [21]. The quality of water quality in the MB on shores of Lake Victoria was reported to be affected by pollution, river inflows, wetland management and flora and fauna populations [22, 23]. The quality of water deteriorated exponentially in the period 2001–2014 due to increased pollution and the high residence time of water. The worst water quality was in 2010 when diffuse pollution intensified due to the lining of more drainage channels within Kampala City in addition to the declining wetland effect [22].

As water runs over and through the watershed, it picks and carries contaminants and soil. If untreated, pollutants wash directly to water ways. The contaminants may infiltrate the ground water, and concentrate in streams and rivers wherefrom they are carried to watersheds and lakes. Agricultural practices in the hinterland to MB greatly affect the purity of water in the bay but could be reversed through exposure of the water to clay minerals [24]. Industries may generate wastewater containing high concentration of greases or oils, heavy metal ions, volatile organic compounds or nutrients like ammonia and phosphates and shall require special treatment before discharge to the environment. Such treatment requires use of clay to adsorb nutrients and photo-decompose algae [9]. Commercial fertilizers, manure or sludge introduces nutrients in water, but nutrients may also enter a water mass through runoff from crop residues, irrigation water or wildlife. Farms with large livestock and poultry operations may pollute the environment through littering. Water flowing to streams picks dirt along the way and gets polluted.

Potable water treatment uses chlorine, fluorine and alums which are believed to be poisonous or ozone a natural ingredient in air. Chlorine kills bacteria, but to keep chlorine in active, it is ammoniated producing a carcinogenic chemical. Fluorine addition to water is thought to cause osteoporosis, brittle bones and teeth and cancer. Yet aluminiumsulphate, poly aluminium chloride, alums added to remove suspended solids in water introduce impurities like epichlorodine which is carcinogenic. Aluminium is poisoning factor in encephalopathy, may cause Alzheimer's disease [25].

In this study we investigated the clarification of water from MB using Fe-montmorillonite clay from Chelel to alleviate use of alums, chlorine and/or fluorine poisons because the use of clays is becoming popular as adsorbent and ion-exchange for water and wastewater treatment in removing heavy metals, organic and inorganic pollutants [26].

The development of urban centers in Kampala involved removing plants, changing surface topography and altering natural water drainage networks. This affected the MB watershed. In addition, manmade land covers like tarmacked roads and buildings act as fast lanes for rain water. Rain water which would be absorbed by soil and plants is sent directly to streams and rivers, thus increasing chances of flooding of MB because more water pools form in the area than would reach if nature was still restricting its flow. By far the leading source of pollution in the bay is polluted rain water runoff as shown in Figure 1 [7] but it could be overcome by damming and treating collected water with clay powder before being released to rivers or lakes [27].

Figure-1. Pollution of water in pictures

The quality characteristics of fresh water resources vary depending on the extent of pollution and the duration the water takes to reach a common collecting basin or lake. Parameters like chemical oxygen demand (COD), color, pH, iron content, nutrients content, total suspended solids, turbidity and others are often used to describe the level of water contamination. The same parameters may be used to show the extent to which pollution has been overcome if they are measured on water that has been purified. COD indicates the amount of oxygen required to oxidize all soluble and particulate organic and inorganic substances in water under specific conditions. The organic matter present in water is oxidized by potassium dichromate (VI) in presence of sulfuric acid silver sulfate and mercury (II) sulfate to produce carbon dioxide and water. The quantity of potassium dichromate (VI) used is calculated by the difference in volumes of ammonium iron (II) sulfate consumed in blank and sample titrations. COD test is commonly used to indirectly measure the amount of oxidizable organic and inorganic compounds in water. If the COD is high, the amount of pollution in the test sample is high. Biochemical oxygen demand, BOD is a measure of, the amount of oxygen that requires for the bacteria to degrade the organic components present in water and wastewater. In most situations, COD is by far higher than BOD for polluted waters [28].

Solids in water refer to matter suspended or dissolved in water or wastewater. Determination of solids in water is very important in assessing the suitability of water used for drinking and industrial purposes. The solid analysis in water can be characterized in many ways such as total solids, suspended solids, dissolved solids, fixed solids, volatile solids and settleable solids. The total solids refer to the material left in the vessel after evaporation of a sample of wastewater and its subsequent drying in an oven at a definite temperature. Water that is low in organic matter and total mineral content and is intended for human consumption may be examined under 103-105°C or 179-181°C.

With more nutrients generated and being introduced into the environment, concern about nutrients' effect on the freshwater environment has risen. While nutrients such as nitrogen and phosphorus are naturally present in the environment, and are important for maintaining a balanced aquatic ecosystem, human activities increase their level and, as a result, contribute to the eutrophication process. Eutrophication is caused by an increase in nutrients, which increase algal bloom, so total phosphate and nitrate content of a water mass implies determination of biological extent of pollution. Colorimetric detection is used by measuring nitrates at an absorbance of 220 nm. Expected nitrate level in freshwater is usually found in the range of 0.1 to 4 mg/L. Unpolluted waters generally have nitrate levels below 1 mg/L. The effluent of some sewage treatment plants may have caused rise to levels in excess of 20 mg/L. Levels of nitrate above 10 mg/L in drinking water can cause a potentially fatal disease in infants called methemoglobinemia, or Blue-Baby Syndrome.

The *total phosphorus* is explicit measure of orthophosphate, condensed phosphate, and organic phosphate which are forms of nutrient pollution. This is done by first digesting the sample to convert all the other forms to orthophosphate. The ascorbic acid method determines all phosphate as the sample is not filtered. Complete oxidation of the total phosphorus in the sample can be achieved. At near-boiling water temperature, the oxidation is performed to ensure complete oxidation of the dissolved and particulate phosphates. Phosphate ions are converted to a phosphomolybdate complex using sulfuric acid ammonium molybdate. The phosphomolybdate is then reduced, using ascorbic acid, to molybdenum blue. Using colorimetric detection, the intensity of the blue color is detected at 880 nm and is proportional to the phosphate concentration in the sample. Spectrophotometric methods are based on the formation of yellow molybdophosphoric acid and its reduction to a blue heteropoly compound, phosphomolybdenum blue [29-31].

Water pollution occurs when harmful substances often chemicals or microorganisms contaminate a stream, river, lake, ocean, aquifer, or other body of water, degrading water quality and rendering it toxic to humans or the environment. Water is vulnerable to pollution because it is universal solvent, so it dissolves more substances than any other liquid. This is why water is so easily polluted. Toxic substances from farms, town, and factories readily dissolve into and mix with it, causing water pollution.

Phosphorus and nitrogen are essential nutrients for the plants and animals that make up the aquatic food web. Since phosphorus is the nutrient in short supply in most fresh waters, even a modest increase in phosphorus can

cause accelerated plant growth, algae blooms, low dissolved oxygen, and the death of certain fish, invertebrates, and other aquatic animals.

The research estimating the levels of phosphates and sulfates in three selected springs in Baraton Location, in the Nandi County, Rift valley province in Kenya showed the phosphates concentration ranged from 2.79 mg/L to 622 mg/L, while sulfates ranged from 109.8 mg/L to 250.98 mg/L [32]. The source of phosphates was artificial or anthropogenic depending on the activities occurring in the area under study [33] (American Public Health Association, 1999). The use of phosphate based detergents has impacted on the water quality by introducing excess nutrients to the water. Accelerated eutrophication may occur as a result of the phosphorus content of detergents in natural waters [34]. The combined effects of excessive concentrations of detergents in natural waters may reduce oxygen concentrations, change color of water, increase turbidity and sedimentation, and decrease in biological activity. In developing countries, discharges from point sources have increased as a result of industrialization and high living standards. Additionally, excessive nutrient loads to rivers resulted untreated wastewater discharges. The phosphate ions in natural water causes most serious environmental pollution because of its contribution to the eutrophication process. The presence of phosphates in water bodies is of international concern due to its effects on water quality. The threshold value of phosphate for drinking water is 0.1mg/L [35].

Classification of clay minerals in the literature has four groups: kaolinite group, illite group, smectite group, and vermiculite. Kaolinite is a clay mineral, with the chemical composition $\text{Al}_2\text{Si}_2\text{O}_5(\text{OH})_4$ or $\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2 \cdot 2\text{H}_2\text{O}$ [36]. Illite is a group of micas of the igneous and metamorphic rocks. They have a unit layer composed of octahedral sheets sandwiched between tetrahedral sheets. Illite is a phyllosilicate or layered aluminosilicate. Its structure is constituted by the repetition of tetrahedron – octahedron – tetrahedron layers. The chemical formula is given as $(\text{K}, \text{H}_3\text{O})(\text{Al}, \text{Mg}, \text{Fe})_2(\text{Si}, \text{Al})_4\text{O}_{10}[(\text{OH})_2, (\text{H}_2\text{O})]$ but there is considerable ion substitution. It occurs as aggregates of small monoclinic grey to white crystals [37]. Montmorillonites consist of an alumina octahedral sheet between two silica tetrahedral sheets. These sheets are bound loosely, making it relatively unstable. The attracted water molecules easily insert themselves between the sheets causing expansion. Nontronite typically has a chemical composition consisting of more than ~30% Fe_2O_3 and less than ~12% Al_2O_3 ignited basis and formula for nontronite is $\text{Ca}_5(\text{Si}_7\text{Al}_{1.8}\text{Fe}_{2.2})(\text{Fe}_{3.5}\text{Al}_{1.4}\text{Mg}_{1.1})\text{O}_{20}(\text{OH})_4$. The dioctahedral sheet of nontronite is composed mainly of trivalent iron (Fe^{3+}) cations, although some substitution by trivalent aluminium (Al^{3+}) and divalent magnesium (Mg^{2+}) does occur [37]. Commonly, kaolinite minerals contain silica 45-56%, alumina 9-14%, iron 0-4 %, calcium or magnesium absent, yet smectites contain silica 20-37%, alumina 10-25%, iron 5-16 %, calcium or magnesium 5-15%, sodium or potassium 5-15% range [37, 38]. Clays and clay minerals are very important industrial minerals; they have been in use as raw materials for hundreds of industrial applications due to its availability and low cost. Clays are utilized in agricultural, construction, engineering, environmental remediation, geology, pharmaceuticals, food processing, and many other applications [39]. Natural clays are known to rid water underground of heavy metal ions and bacteria. Clay and clay minerals have also been explored as the adsorbents for the removal of heavy metals from aqueous solution. The advantages of using clay minerals as the alternative adsorbents for the removal of heavy metals are high ion sorption/exchange capacity, low permeability, swelling ability, chemical and mechanical stability, and large specific surface area. The adsorption of heavy metals from aqueous solution using clay minerals are influenced by several factors such as pH, temperature, the presence of other compounds, initial concentration [40, 41]. Many natural clays and their modified forms have been used to remove ammonia from aqueous solutions [42-46]. Natural clays are abundant, readily available low-cost natural resource which is nontoxic to ecosystem; this makes it a better adsorbent. Over the recent years, research on the modification of clay to increase their adsorbent capacity to remove other contaminants from drinking water other than metals is in progress [47].

Clays were reported to play an important role in the environment as natural scavengers of pollutants through ion exchange or/and adsorption. Thus, clays invariably contain exchangeable cations and anions. The prominent cations and anions found on clay surface are Ca^{2+} , Mg^{2+} , H^+ , K^+ , NH_4^+ , Na^+ , SO_4^{2-} , Cl^- , PO_4^{3-} and NO_3^- . Large surface area, chemical and mechanical stability, layered structure and high cation exchange capacity were shown to be responsible for adsorbent behavior of clays and clay minerals. Both Bronsted and Lewis type of acidity in clays [48] boost the adsorption capacity of clay minerals. The Bronsted acidity arises from protons on the surface formed by dissociation of water molecules of hydrated exchangeable metal cations on the surface. The Bronsted acidity may also arise if there is a net negative charge on the surface due to the substitution of Si^{4+} by Al^{3+} in some of the tetrahedral positions and the resultant charge is balanced by H_3O^+ cations. The Lewis acidity arises from exposed trivalent cations, mostly Al^{3+} at the edges, or Al^{3+} arising from rupture of Si-O-Al bonds, or through de-hydroxylation of some Bronsted acid sites. The edges and the faces of clay particles can adsorb anions, cations, and non-ionic and polar contaminants from natural water. The contaminants accumulate on clay surface leading to their immobilization through the processes of ion exchange, coordination or ion-dipole interactions. Sometimes the pollutants can be held through H-bonding, van der Waals interactions, or hydrophobic bonding arising from either strong or weak interactions. The strength of the interactions is determined by various structural and other features of the clay mineral. As far back as 1977, van Olphen [49] had cited the active sites in clays to include: Bronsted acid or proton donor sites, created by interactions of adsorbed or interlayer water molecules; Lewis acid or electron acceptor sites occurring due to dihydroxylation; oxidizing sites, due to the presence of some cations in octahedral positions or due to adsorbed oxygen on surfaces; reducing sites produced due to the presence of some cations, and surface hydroxyl groups, mostly found in the edges, bound to Si, Al, or other octahedral cations. Clay composites are therefore good adsorbents because of the existence of several types of active sites on the surface. The edge hydroxyl groups have been particularly active for various types of interactions. Clays and modified clays have been reported to adsorb ions of several heavy metals like arsenic, cadmium, chromium, cobalt, copper, iron, lead, manganese, nickel, and zinc


from aqueous medium. The adsorption capacities varied from metal to metal and depended on the type of clay used [50]. Composites can be defined as natural or synthesized materials made from two or more materials with significantly different physical and chemical properties which remain separate and distinct at the microscopic or macroscopic scale within the material. Composites are synthesized to combine the desired properties of the materials in the composite.

2. Materials and Method

2.1. Study Area

The Murchison bay is located to the south of Kampala. It lies in the watershed for Nakivubo channel which drains much of the Kampala areas shown in Figure 2.

Figure-2. Map of Uganda showing location of Murchison bay

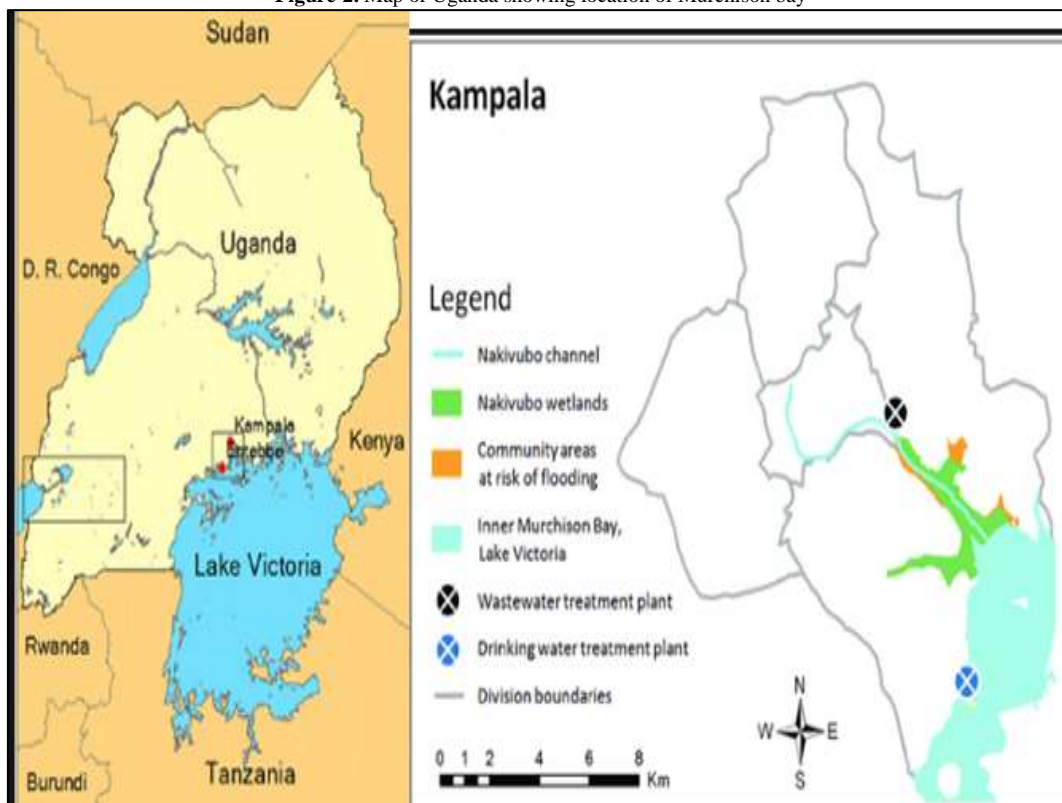

2.2. Sampling of Water

Samples of water (2L) were drawn into plastic bottles, sealed, packed freeze box and transported to the laboratory in Makerere University, where they were stored in a freezer at 4°C for future use. The water used in the study was collected at 0, 50, 100, 150 and 200m in the bay south of river Nakivubo. The most important task of water quality analysis is sampling [51].

Water was sampled in brown reagent bottles that had been prewashed with nitric acid, detergent and rinsed with distilled water several times. A total of 10 samples were collected for analysis. The samples were tightly capped and placed in a cool box immediately. They were then transported to the laboratory, and then filtered using whatman filter papers to avoid interference due to turbidity and color. The samples were then kept in a refrigerator at a temperature below 4°C.

2.3. Determination of COD

To sample (10mL) in a reaction flask was added glass beads followed by mercury (II) sulfate solution (1mL), then added potassium dichromate (VI) solution with continuous swirling, then slowly added silver (I) sulfate-sulfuric acid solution (15mL). Refluxing apparatus was setup and the mixture was digested over a hotplate for two hours, then cooled. The inside of flask and condenser was rinsed with distilled water (25mL) and solution added to flask. Ferroun indicator (2drops) was added to mixture in flask and titrated with 0.025M ammonium iron (II) sulfate solution to blue end point, Vs. A blank titre on distilled water was also carried out in the same way as was done on sample of water from the bay, Vb.

$$\text{COD} = \frac{8 \times 1000 \times \text{DF} \times \text{M} \times \text{Vb} - \text{Vs}}{\text{Volume of sample}}$$

Where DF is dilution factor if applied; M is molarity of ammonium iron (II) sulfate solution; Vb is volume consumed by blank and Vs is volume consumed by sample. COD is milligrams per liter or ppm.

2.4. Preparation of Phosphate Standards

The standards were prepared according to the standard methods for the examination of water and waste water [33]. 1000 ppm of standard phosphate solution was prepared by weighing analytical grade potassium dihydrogen orthophosphate (1.4329g) and diluting to 1000 ml in a standard volumetric flask using distilled water. In the preparation of 1, 2, 3, 4, 5, 6, ppm solution the standard phosphate solution (0.1 ml, 0.2 ml, 0.3 ml, 0.4 ml, 0.5 ml and 0.6 ml) were respectively diluted to 100 ml with distilled water.

2.5. Analysis for Phosphate Ions

Each of the standards (10mL), blank (10mL) and samples (10mL) were measured into a test tube. 2 mL of combined reagent (2mL) were added to the standards, blanks and samples. Phenolphthalein indicator (1 drop) was added to the solutions upon which pink color developed and 5N sulfuric acid was added drop wise to discharge the color. Time (10 minutes) was allowed to elapse, after which absorbance of each solution was measured at 880 nm on a UV-VIS spectrophotometer.

2.6. Clay Sampling

The samples were collected at depths in range of 35 – 150 cm from the surface to minimize the effect of weathering and contamination.

2.7. Preparation of Clays

Raw samples of clays were separately soaked in distilled water, sieved to pass through a mesh of 5.3×10^{-4} m diameter, dried at 105°C and ground to powder using a rolling mill. The clay powders will be stored for future use.

2.8. pH Determination

The water sample is properly mixed and stirred using a glass rod. Using a watch glass, sample of water (40mL) was added to the beaker. The temperature of the water was allowed to stabilize by allowing the sample stand for 1 hour while stirring. The temperature of the water was determined and the temperature was adjusted. The pH of the sample was recorded.

2.9. Total Solid Suspended in Water Determination

This was performed following standard method 2540. A known volume of vigorously shaken sample (50mL) was filtered into a pre-weighed glass fibre filter disk fitted to suction pump, and washed successively with distilled water. The filter was carefully removed from the filtration apparatus and dried for an hour at 105 °C in an oven, cooled in desiccator and re-weighed to constant weight.

3. Results and Discussion


3.1. Characterization of Chelel Clay Sample

The clays from Chelel were formed by alteration of granitoids, rhyolites, volcanic ash, and dickites in the ultra-basic media. The clay was mined from a valley yet diagenesis took place uphill, the possibility of in situ alteration was unlikely as the clays were eroded. The clays showed was brown or orange due to presence of iron in different oxidation states as well as difference in the mineralogical compositions in the different strata resulting from the levels of alteration and migration of silica. The mineralogical compositions of clays give hint on the structural, surface and ion-exchange properties of the material. The world over, clays with high smectite content (bentonites and montmorillonites) are used in the manufacture of ion-exchangers and filter aids.

Chemical analyses of clays have always revealed the class of alumino-silicates to which the analyzed material belongs [37, 52]. It was useful to establish the elemental constitution of the clay because surface and ion-exchange properties of solids depend on the elements present. The clay contained silica, 44.3%; alumina, 19.4%, iron (III) oxide, 6.2%, calcium oxide, 2.4%, sodium oxide, 3.4%, potassium oxide, 2.6% and loss on ignition was 9.9. Basing on elemental composition, Chelel clay resembled bentonites. On the basis of relative percentages of aluminium, silicon and alkaline metals or alkaline earth metals [37, 52].

The IR absorption spectrum for the natural clay had absorption band at 3640 cm^{-1} attributed to stretching vibrations of the OH group while that at 3454 cm^{-1} , the presence of interlayer water. The amount of adsorbed water in clays is related to the deformation vibrations of the H–O–H group (1664 cm^{-1}). The bands at 1042 and 798 cm^{-1} are attributed to Si–O stretching vibrations [53]. The bands at 526 and 466 cm^{-1} correspond to deformation vibrations of Si–O–Al and Si–O–Si, respectively [54]. The infra-red spectrum for clay sampled from Chelel is shown in Figure 3; with broad peaks at 3700 cm^{-1} showing presence of water on clay.

Figure-3. IR spectrum of clay

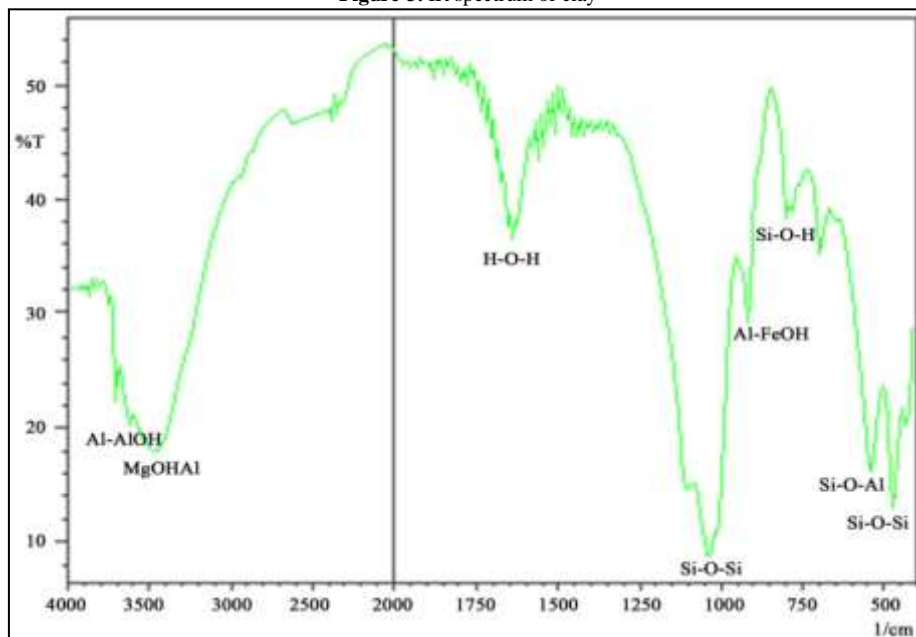


The IR spectra for Chelel clays showed peaks due to Mg-OH-Al stretch at 3490 cm^{-1} , Al-Al-OH stretch at 3480 cm^{-1} , H-O-H at 1800 cm^{-1} and 1620 cm^{-1} , Si-O-Si at 1100 cm^{-1} , Al-Fe-OH at 800 cm^{-1} , Si-O-Al at 600 cm^{-1} and Si-O-Si at 490 cm^{-1} showed that these clays conform to the structure of montmorillonite [39].

The XRD pattern for clays sampled from Chelel is shown in Figure 4; with nontronite and kaolinite as main clay minerals.

Key: smectite (S), illite (I), kaolinite (K), K-feldspars (Kf), plagioclase (Pc) and quartz (Q)

Figure-4. XRD pattern for clay from Chelel

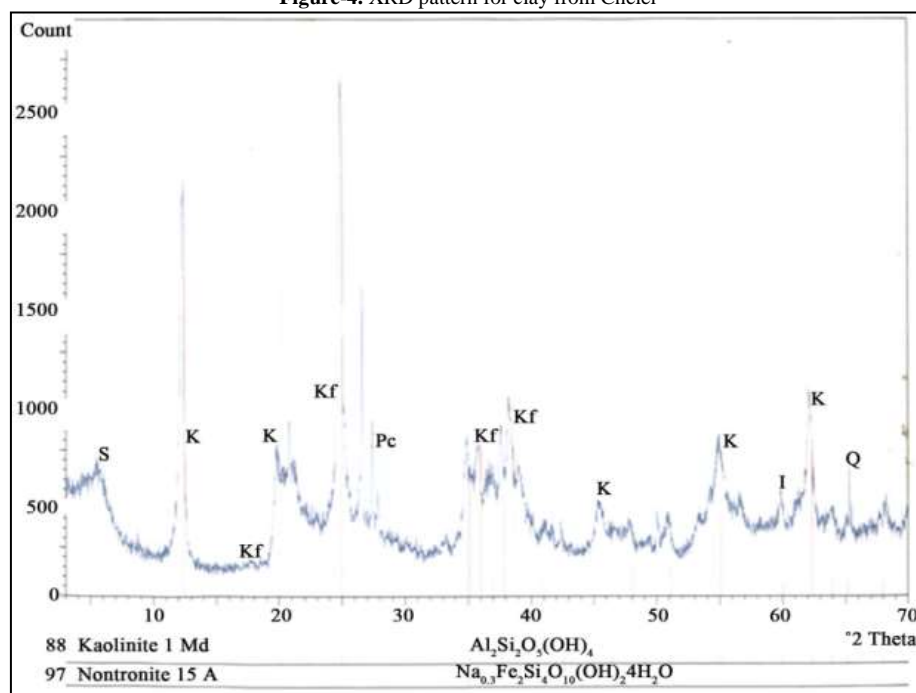

The XRD pattern showed presence of nontronite and kaolinite clays as well as feldspars, quartz and plagioclase as unaltered tuffs. The clay showed presence of smectites, feldspars and plagioclase revealing that they were formed from tertiary-quaternary volcanic ashes or glass. The clay contained quartz, 10.4%, nontronite, 50%, feldspars, 20.0% and kaolinite, 7.7% showing that these clays were of the phyllosilicate type. The dominant clay mineral in the clay sample was nontronite. The smectite/kaolinite ratios for Chelel deposits varied between 1:4 and 1:0.13 showing that weathering took place in alkaline medium and kaolinitization of the clay was a separate process [55]. Basing on elemental and mineralogical compositions as well as X-ray and infra-red spectra patterns, the clay satisfied the formulae $(\frac{1}{2}\text{Ca}, \text{Na})_{0.33}(\text{Mg}, \text{Fe}^{+2})_3(\text{Si}, \text{Al})_4\text{O}_{10}(\text{OH})_2 \cdot 4\text{H}_2\text{O}$ and $\text{Ca}_{0.5}(\text{Si}_7\text{Al}_{1.8}\text{Fe}_{0.2})(\text{Fe}_{3.5}\text{Al}_{1.4}\text{Mg}_{0.1})\text{O}_{20}(\text{OH})_4$ and was named nontronite or Fe-montmorillonite [37, 39, 56].

3.2. Characterization of Murchison Bay Waters

The parameters used to assert whether a water resource is safe or polluted include chemical oxygen demand (COD), biological oxygen demand (BOD), pH, total suspended solids (TSS), nutrient concentration and others. Of these parameters, Murchison bay waters sampled on 14th December, 2018 showed COD ranging from 78 to 52 mgL⁻¹, pH ranging from 7.6 to 6.8; TSS ranged from 3.8 to 3.4mgL⁻¹; yet TP ranged from 0.25 to 0.22mgL⁻¹ in a distance ranging from 0m to 200m into the bay. This revealed the impurities were dispersing as we moved towards the lake. The permissible published parameters of safe fresh water sources are as follows; COD 10.0mgL⁻¹, pH range of 5-9 and iron (II) concentration of 2.0mgL⁻¹ [7] (EPA). Basing parameters published, the waters of Murchison bay can be declared polluted.


3.3. Variation of COD

As Chemical Oxygen Demand (COD) is a measure of the total quantity of all inorganic and organic oxidizable impurities in the water and wastewater yet Biochemical Oxygen Demand (BOD) is a measure of, the amount of oxygen that require for the bacteria to degrade the organic components present in water and wastewater; we undertook to determine COD so as to obtain a representative value of inorganic and organic pollution levels of waters of MB. There was decrease in COD with increase in distance into the MB showing level of pollution water decreased as we approached Lake Victoria. This happened as a result of dilution because waters of the lake diffuse in MB as well as electrostatic neutralization of charges on particle MB water when it mixed with waters of the Lake leading massive settling of pollutants at base of the bay. The data obtained on COD have plotted in Figure 6. The results in Figure 5 revealed there a sharp fall in COD as concentration of clay increased from 0.0 to 0.4 gL⁻¹ due more pronounced adsorptive tendencies for the inorganic and organic pollutants on clay minerals as well as neutralization of electrostatic charges on suspended particles in MB waters by the clay composites leading to flocculation. So filtration of the water after interacting with clays almost exhaustive eliminated all oxidizable matter in clarified water from MB. The COD of samples was computed and recorded.

The COD needed to oxidize organic and inorganic impurities in the waters from MB decreased as the bay was traversed from 0m to 200m because concentration microorganisms in water decreased. This indicate dilution of water pollutants as the water headed towards the lake [22].

The highest average decrease in COD was attained using clay concentration of 0.4gL⁻¹ representing 75.5% fall in in this experiment. This indicated that the clay served very well as flocculent and coagulant for the impurities and microorganisms in the bay waters. However, the percentage fall in COD is less than that was obtained as 90.6%, when [1] treated sewage with bentonite. The value obtained in this study is comparable to what was obtained in literature because the study used Fe-montmorillonite which cannot be as effective as Na-montmorillonite. The Na-montmorillonite has much higher surface area and ion-exchange capacity than Fe-montmorillonite used in this study. However, the clay form Chelel is good enough to overcome remove inorganic, organic, and microbial pollutants from water. When low COD is obtained, the target for wastewater management would have been achieved because removal of COD is indicative of elimination of inorganic and biodegradable materials from water [2].

Figure-5. Plot of variations of COD against clay concentration

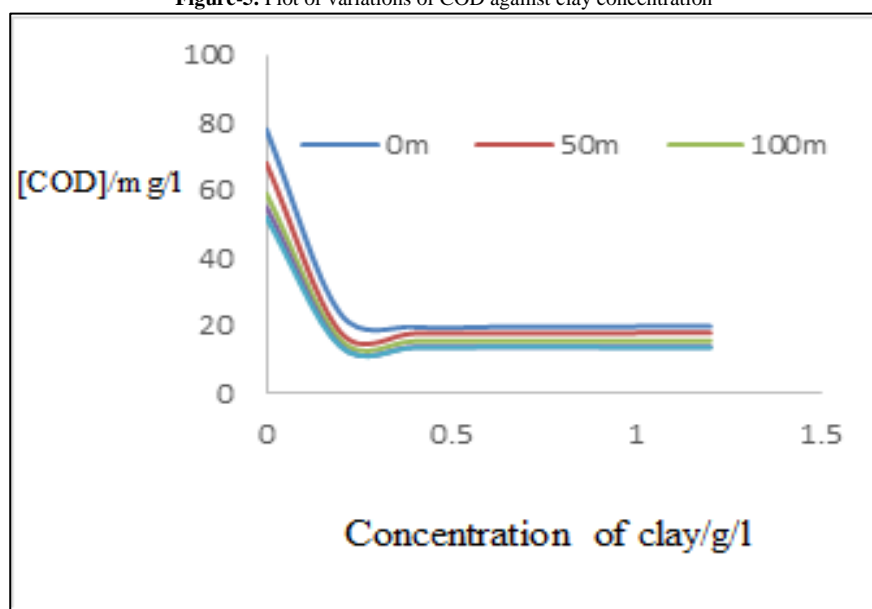

The figure 5 shows that the optimum coagulation and flocculation of impurities in MB water occurred at clay concentration of 0.4gL⁻¹ because COD reached the minimum value at this concentration [1]. So effective adsorption using lower concentration of clay completely removed the ions in the MB water through electrostatic and mechanistic bridging effects of the clay used [19]. Treatment of MBwater with higher concentration of clay than 0.4g/L resulted in increased clarity of water because the added clay availed more adsorption sites for impurities in the water [57]. There was no observed influence on removal of COD to the location or point of sampling of water in

the MB. Similarly, then initial concentration of COD caused less significant influence on the rate of fall of COD probably because the coagulation and flocculation processes were highly favored during the clarification of MB water and the clay provided large enough number of sites to adsorb and neutralize charges on impurities in the water tested.


When MB water was treated with 0.4g/L^{-1} of clay, both inorganic and organic pollutants were removed from water [58] resulting in highest fall in COD of 78.1%. The fact that the clay achieved 78% decrease in COD paves way to replacing alums that are thought to cause the Alzheimer's disease even though they are reported to attain 80-90% efficiency at removing COD [59]. The percentage decrease in COD was plotted in Figure 6a. The available data showed that fall in COD increased with increase in concentration of clay used up to 0.4g/L . Beyond 0.4g/L , the decrease in COD remained fairly constant.

The percentage decrease in COD indicated that the clay used worked well, efficiency greater than 73%.

3.4. Variation of pH

The pH of water sampled from Murchison bay was higher than 7, the neutral pH indicating that the water contained basic contaminants which needed to be removed to restore neutrality. Although the pH of the water was within the acceptable range for the environmental protection agency [7] an attempt to determine how it varies after treating the water with the clay was necessary. During the study the pH fell from as high as 7.6 to as low as 6.1. The data on changes in pH and concentration of clay used was plotted in Figure 6. The results in Figure 6 revealed that clay removed pollutants in the MB water with consequence that pH decreased.

Figure-6. Plot of variations in pH versus concentration of clay used

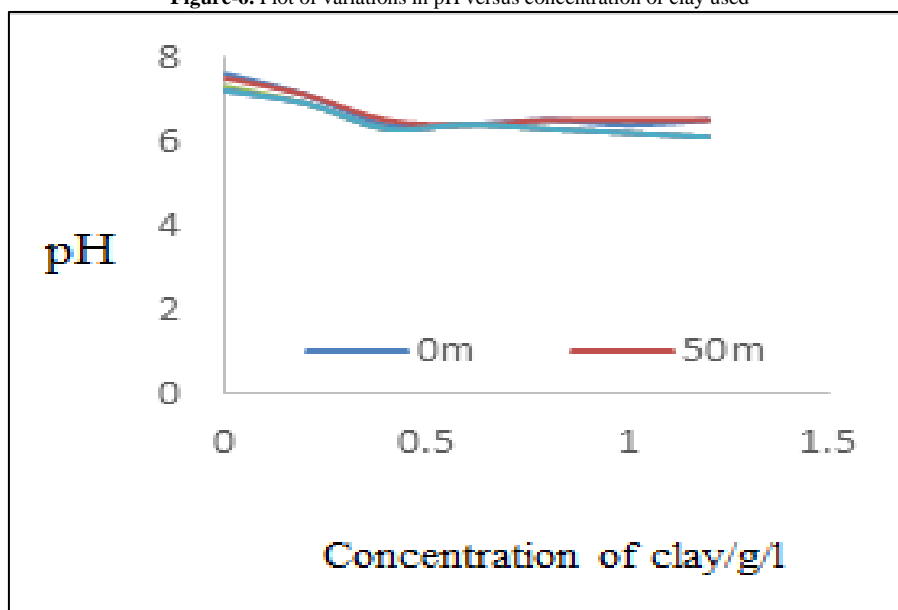

The changes in pH were only slight, but the greatest decrease in pH occurred when the lowest concentration of clay used was 0.4g/L^{-1} implying the adsorption of pollutants and neutralization of electrostatic charges on particles in MB water attained. This result coincided with what was published by researchers on treatment of sewage and wastewater [1, 60]. Determination of pH of treated water is important in relaying information on removal of inorganic and organic pollutants from water.

3.5. Variations in Total Phosphate Ion, TP Concentration

The TP values obtained on the samples ranged from 0.22 to $0.25 \pm 0.05\text{ mg/L}^{-1}$ showing that the concentration was nearly uniform in the water save for experimental errors that could have caused statistical variations. The determined phosphate ion concentration in MB is higher than what was published, 0.022mg/L^{-1} for Nyanza gulf [61]; $0.1 - 4.5\text{ mg/L}^{-1}$ [22] revealing that the extent of pollution is rising steadily as time passes. The determined concentration of P in MB water is above the maximum recommended to be present in freshwater for drinking water [7]. The values are large enough to warrant algal blooms in MB water but are much less than what was obtained earlier years [22]. These values showed water in MB is heavily polluted either by sewage or fertilizers used in the farms in the valleys from which this water collects to join Nakivubo channel. However, MB waters are less polluted than springs in western rift valley of Kenya [32]. The data obtained on variation of concentration of phosphate ions in MB with concentration of clay used was plotted in Figure 6. The results in Figure 6 have revealed that effective binding of phosphate ions on clay as well neutralization of electrostatic charges on particles took place with the clay concentration range of 0.0 to 0.4g/L^{-1} because it is within this range of concentrations that the concentration of phosphate ions fell greatly. Analysis of phosphates could be improved by applying the high point standard method which prevent the interference due to silicates based on the rates of reactions between the phosphate and silicates. The kinetics of formation of a complex between molybdenum ions in the presence of silicates and phosphates could

be applied for water analysis. Since this was not done, the phosphate concentration could have been exaggerated due to silicate ion interference.

The data in Figure 6 depicts that effective adsorption of phosphate ions on clay or and neutralization of charge by clay occurred as concentration of clay increased from 0.0 to 0.4g/L^{-1} . This result is supported by what was published when it was found that 0.4g/L^{-1} bentonite would effectively coagulate and flocculate sewage [1]. So clay under study effectively acted on phosphate pollution the same way. However, manmade sources of phosphate like human sewage, agricultural run-off from crops, sewage from animal feedlots, vegetable and fruit processing, chemical and fertilizer use or manufacturing, and detergents could have introduced the phosphate in MB [61]. High phosphate concentrations in water increased rates of plant growth and proliferation of planktonic and epiphytic and epibenthic algae making MB water green in color [62]. Phosphate concentration was generally high in MB samples. There is need to use sustainable farming methods to avoid influx of nutrients into the water bodies and impact on the quality of fresh water systems. As clays possess Bronsted acidity, the edges and the faces of clay particles adsorbed anions, cations, and non-ionic and polar contaminants from MB water. The contaminants accumulated on clay surface became immobilized through either ion exchange, coordination or/and ion-dipole interactions processes. The pollutants could be held through hydrogen bonding, van der Waals interactions, or hydrophobic bonding arising from either strong or weak interactions. The strength of the interactions is determined by various structural and other features of the clay mineral. As far back as 1977, van Olphen had cited the active sites in clays to include proton donor sites, created by interactions of adsorbed or interlayer water molecules; electron acceptor sites occurring due to dihydroxylation; oxidizing sites, due to the presence of some cations in octahedral positions or due to adsorbed oxygen on surfaces; reducing sites produced due to the presence of some cations, and surface hydroxyl groups, mostly found in the edges, bound to Si, Al, or other octahedral cations. Clays are the-refore good adsorbents because of the existence of several types of active sites on the surface. The percentage decrease in phosphate concentration varied from as low as 37 to $48.8 \pm 0.5\%$. The highest percentage fall in phosphate concentration was observed at clay concentration of 0.4g/L^{-1} indicating that the clay worked optimally.

Figure-7.


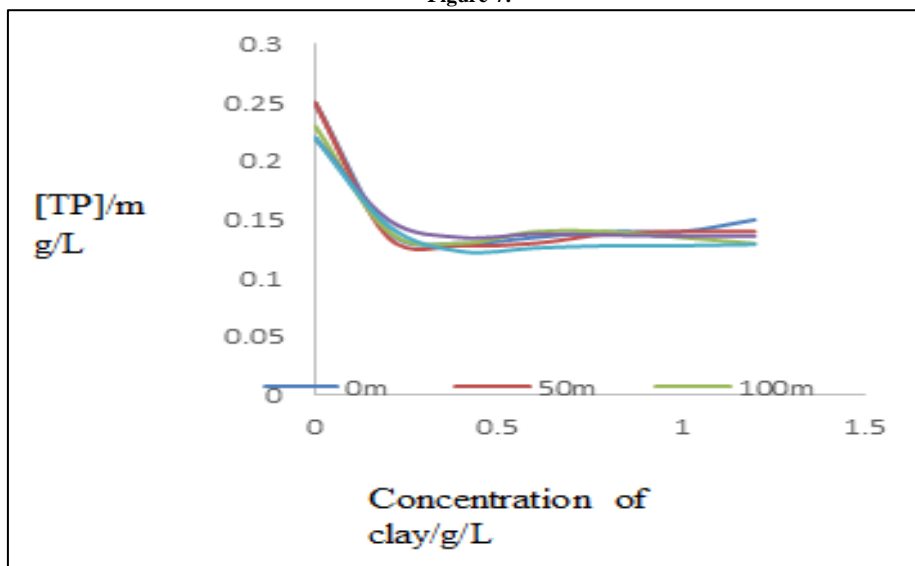


Figure-8.

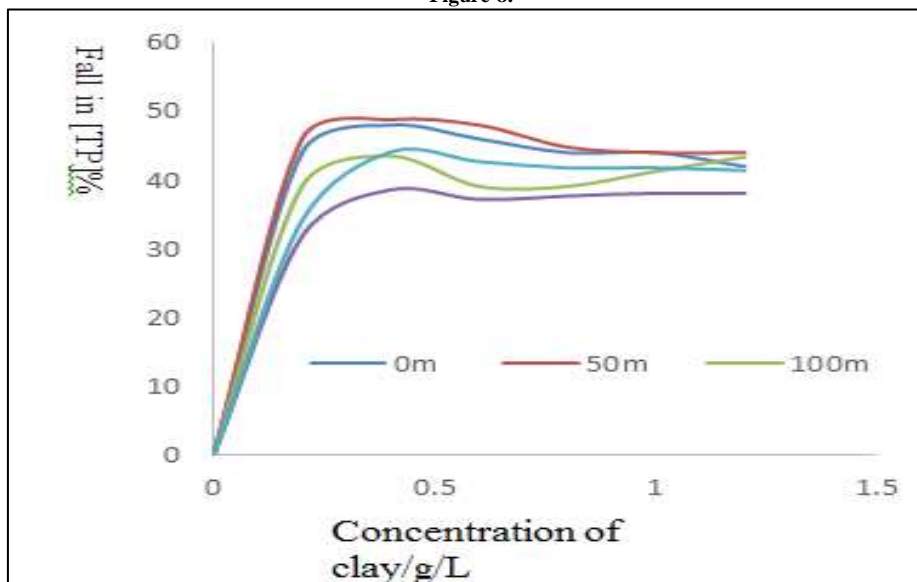


The mean efficiency with which clay at 0.4g/L concentration removed phosphate ions was found to be 44.6 ± 1.63 % which is less than the efficiency at which COD was removed. There was competition between complexation reaction between iron and phosphate, adsorption and discharge of charges on ions as the ions approached the clay lattice. There was no observed influence on removal of phosphate to the location or point of sampling of water in the MB. Similarly, then initial concentration of phosphate ions caused less significant influence on the rate of fall of concentration of phosphate ions probably because the adsorption and ion-exchange processes were highly favored during the clarification of MB water and the clay provided large enough number of sites to adsorb, exchange or/and neutralize charges on phosphate or anions in the water tested.

Several researches have reported the on the ongoing increase in pollutant loading in the MB waters [15, 22, 63] without detailing how the pollution can be reduced. In this study we have found that natural Fe-montmorillonite clay from Chelel amended pollution of water in MB to at least 76% efficiency of removing impurities in MB water. The nitrate ions accumulated on clay surface were immobilized through the processes of ion exchange, coordination or ion-dipole interactions. The strength of the interactions is determined by various structural and other features of the clay mineral. As far back as 1977, van Olphen [49] had cited clays to possess reducing sites produced due to the presence of some cations, and surface hydroxyl groups, mostly found in the edges, bound to Si, Al, or other octahedral cations. It is probable that these sites played a vital role in removing anionic contaminants from MB water. The Chelel clay was therefore a good adsorbent for nitrate ions because of the existence of several types of active sites on its surface. There was no observed influence on removal of nitrate ions to the location or point of sampling of water in the MB. Similarly, then initial concentration of nitrate ions did not cause significant influence on the rate of fall of concentration of nitrate ions probably because the adsorption and/or ion-exchange of nitrate ions to or with clay were highly favored during the clarification of MB water and the clay provided large enough number of sites to adsorb and exchange ions in the water tested.

3.6. Variations in TSS

The total amount solids suspended in waters of MB decreased with distance towards the lake from 59 to 25 ± 1.32 mgL^{-1} but was earlier observed to vary from 42 to 56 ± 1.32 mgL^{-1} [22] The variations in TSS must have resulted from dilution of water in MB by that from the lake and neutralization of electrostatic charges on particles in water resulting from mixing of the waters of the lake and MB leading to massive settling of suspended solids. However, presence of such a large mass of suspended solids in water is indicative of contamination by soluble and insoluble materials in water carried from the streams that feed the MB. This showed that as KCCA paved more areas of the Kampala city, more drainage canals were constructed and the volume of wastewater that runs very fast to MB is larger than ever. Hence more suspended solids reach MB than ever before leading due to flooding. So higher rate of pollution in the MB could be due to the ongoing wetland encroachment and rapid increase in the pollutant loading in the streams flowing to the MB. Consequently, the TSS is large. The data obtained on variations of TSS with concentration of clay used to clarify the water was plotted in Figure 9. The results in Figure 9 showed sharp decrease in TSS as concentration of clay increased from 0.0 to 0.4gL^{-1} indicating effective flocculation in addition to adsorption had occurred. There was insignificant change in TSS when the concentration of clay used was increased beyond 0.4gL^{-1} probably because the electrostatic charges on suspended and dissolved solids had been neutralized and there was no further reaction with added clay beyond the optimum concentration of 0.4gL^{-1} [1].


Figure-9. Effect of clay concentration on TSS

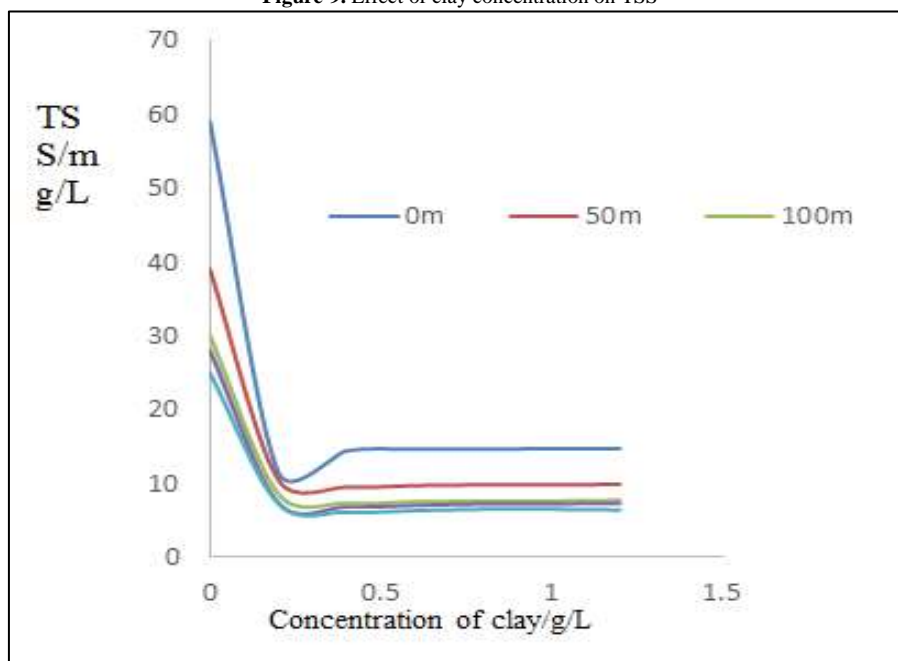

The mean decrease in TSS on Figure 9a attained high value of 76.7 ± 0.45 % fall when the clay concentration was 0.4gL^{-1} indicating optimum reactions had been achieved. This has been interpreted as showing that the clay

worked well on removing suspended solids from MB waters. So water from MB can be clarified using natural clay composites.

Figure-9a. Plot percentage fall in TSS versus clay concentration

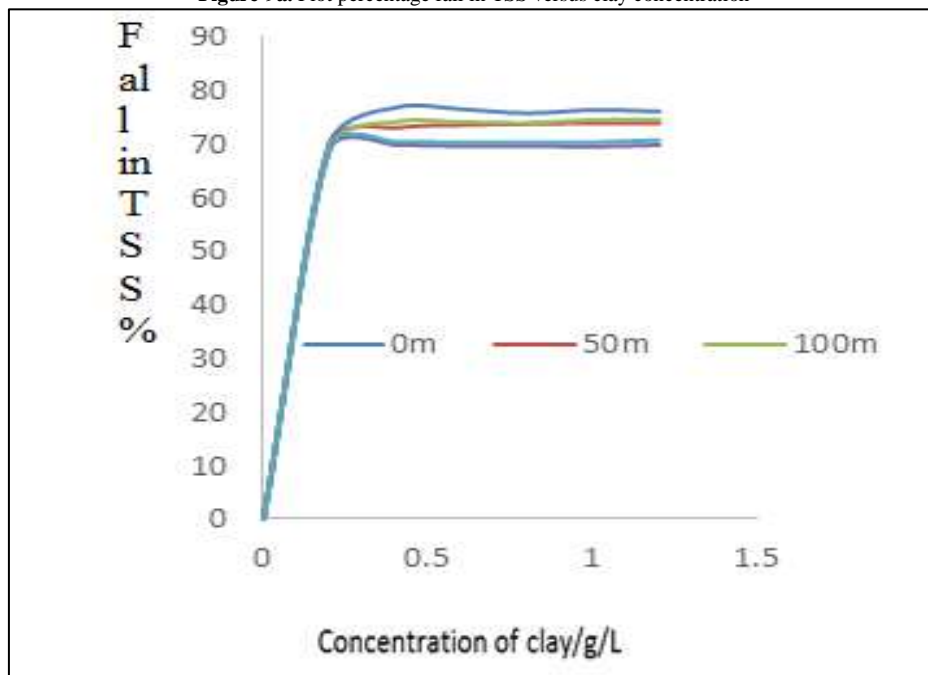

Suspended solids in water can be living organisms, inorganic or organic solids and they tend to acquire electrostatic charges to keep suspended. Interactions between the partial charges on the suspended solids with the ion-dipoles on clay surfaces could have caused the particles to settle after being stirred with clay powder. Since the edges and faces of clay particles readily adsorb anions, cations, and non-ionic and polar contaminants from natural water. The suspended solids accumulated on clay surface leading to their immobilization through the processes of ion exchange, coordination or ion-dipole interactions. It is also possible that suspended solids became held on surface of clay through H-bonding, van der Waals interactions, or hydrophobic bonding arising from either strong or weak interactions. The strength of the interactions was dependent on structural and other features of the clay mineral. Presence of surface hydroxyl groups at the edges of clay lattices bonded to silicon, aluminium, or other octahedral cations, clays have high potential for adsorbing impurities in water. Hence Chelel clay readily removed solids from water. There was no observed influence on rate of removal of TSS to the location or point of sampling of water in the MB. Similarly, then initial concentration of TSS caused less significant influence on the rate of fall of TSS as concentration of clay increased probably because the coagulation and flocculation processes were highly favored during the clarification of MB water and the clay provided large enough number of sites to adsorb and neutralize charges on solids in the water tested.

Behavior of MB water resembled colloids suspended in water. Colloids could remain in suspension due to a number of processes. The deposition of the particles in MB water may have occurred through processes like surface filtration, size exclusion, bridging, and attachment. Cake or surface filtration occurred when particles with sizes larger than the pore size of the clay medium through which the MB water was filtered. Such particles were captured at the surface because particles were too large to pass through the pores. Depending on pore size and particle size distribution, larger particles were trapped in smaller pores; and this was due to the straining or size exclusion mechanism [64]. It was also possible that suspended solids were removed through hydrodynamic bridging. Bridging may have occurred when several suspended particles arrived at a pore in clay mineral at the same time and wedged together [65]. A bridge consisting of multiple particles was formed and thereby excluding dissolved and suspended solids from treated MB water to improve the quality. Particle bridging occurred under the influence of high rotation rate when MB water had mixed with clay because high velocities increased the probability that several particles entered the pores on clay at the same time [66]. This was related to force balance between hydrodynamic forces and the repulsive particle-grain forces. At higher flow rates the hydrodynamic forces overcame the repulsive forces, thereby favoring bridging. Suspended solid deposition due to bridging was reported to depend on pore size distribution of the aquifer, the colloid size and concentration, and colloid-grain surface interaction forces, but this does not seem to hold when clay powder is added to polluted water because addition of clay beyond the optimum concentration of 0.4g/L did not yield significant changes in COD, TSS and TP. So the bridging mechanism would take more impurities out of MB water because the ratio between the grain size and particle size was the most important parameters influencing bridging. Another aspect affecting bridging was the colloid concentration suspended in groundwater. Higher concentration increases the colloid flux and therefore leads to an increase of the likelihood of bridge formation [67]. It was reported that the most important parameters for bridging were particle concentration, flow velocity as higher flow velocity mobilized more particles and also overcome the repulsive particle-grain surface forces which would result in bridging, aspect ratio; the ratio between pore size and particle size

influences the number of particles required to form a bridge. Small ratios are favorable for bridging, and properties of the colloid properties like shape, surface charge and roughness [67]. The when polluted water is vigorously stirred with clay powder, the concept of critical flux is introduced and linked to clay particle–impurity particle and impurity particle–clay surface interactions, so the particles of pollutants are captured on the walls between the micro channels in the clay lattice leading to the progressive formation of flocs. The complex interplay between multi-body surface interactions and hydrodynamics at nanometric scale leads to coagulation and flocculation observed experimentally in treatment of wastewater. Filtration removed the coagulated impurities and flocs paved way to overcoming pollutants in MB water.

4. Conclusions

Fe-montmorillonite from Chelel at concentration of 0.4g/L optimally decreased COD by $78.1 \pm 0.21\%$; TP by $44.6 \pm 1.63\%$, and TSS by $76.7 \pm 0.45\%$ showing that the natural composite is good enough at removing most pollutants from water from MB at as low concentration as 0.4g/L of clay.

The relative percentages for removal of TP are lower than expected because the clay was already containing iron which affected its efficiency at removing iron and the phosphate.

Use of clay at concentrations higher than 0.4g/L yielded insignificant changes in MB water due to saturation or and competition.

Recommendations

More work should be done to establish the optimum working pH and temperature for the clay on MB waters.

There is need to establish whether acid or/and alkali leaching of the clay would enhance its water clarifying properties.

There is need to rule out possible interference of silicate ion in the phosphate analyses.

The management of the lake should be directed towards the reduction of nutrient input in the lake and reduction of sediment loading into the lake.

Sustainable farming methods should be encouraged to avoid influx of nutrients into the water bodies and impact on the quality of domestic water systems.

Acknowledgement

We are greatly indebted to Mr. Ruhara R. Budigi for the instruments used in analyzing the water.

References

- [1] Syafalni, Rohana, A., Ismail, A., and AimiNadiyahMohd, I., 2013. "Wastewater treatment using bentonite, the combinations of bentonite-zeolite, bentonite-alum, and bentonitelimestone as adsorbent and coagulant." *International Journal of Environmental Sciences*, vol. 4, p. 391.
- [2] Jiang, J. Q., Zeng, Z., and Pearce, P., 2004. "Evaluation of modified clay coagulant for sewage treatment." *Chemosphere*, vol. 56, pp. 181-185.
- [3] Musinguzi, M. and Ejiri, A. H., 2016. "Trends in degradation of freshwater urban wetlands in Kampala Uganda a case study of Lubigi wetland." *International Journal of Research in Earth and Environmental Sciences*, vol. 4, Available: <http://www.ijsk.org/ijrees.html>
- [4] Bellir, K., Lehocine, M. B., and Meniai, A.-H., 2013. "Zinc removal from aqueous solutions by adsorption onto bentonite." *Desalination Water Treatment*, vol. 51, pp. 5035–5048.
- [5] Aljlil, S. A. and Fares, D. A., 2014. "Adsorption of copper and nickel on bentonite clay from wastewater." *Athens Journal of Natural and Formal Sciences*, vol. 1, pp. 21-30.
- [6] Al-Jlil, S. A. and Alsewailem, F. D., 2009. "Saudi arabian clays for lead removal in wastewater." *Applied Clay Science*, vol. 42, pp. 671-674.
- [7] U.S. Environmental Protection Agency. "Eutrophication." Available: <http://www.epa.gov/maia/html/eutroph.html>
- [8] Srinivasan, R., 2011. "Advances in application of natural clay and its composites in removal of biological, organic, and inorganic contaminants from drinking water." *Advances in Materials Science and Engineering*, vol. 11, pp. 1-17.
- [9] Kennedy, K. K., Maseka, K. J., and Mbulo, M., 2018. "Selected adsorbents for removal of contaminants from wastewater: Towards engineering clay minearls." *Open Journal of Applied Sciences*, vol. 8, pp. 355-369. Available: <http://doi.org/10.4236/ojapps.2018.8807>
- [10] Zadaka, D., Nir, S., Radian, A., and Mishael, Y. G., 2009. "Atrazine removal from water by poly cation-clay composites: effect of dissolved organic matter and comparison to activated carbon." *Water Research*, vol. 43, pp. 677-683.
- [11] Barbooti, M., 2015. "Simultaneous removal of chromium and lead from water by sorption on Iraqi Montmorillonite." *Journal of Environmental Protection*, vol. 6, pp. 237-249.
- [12] Hecky, Mugidde, R., Ramlal, P., Talbot, M., and Kling, G., 2010. "Multiple stressors cause rapid ecosystem change in Lake Victoria." *Freshwater Biology*, vol. 55, pp. 19–42.
- [13] Scheren, P., Zanting, H., and Lemmens, A., 2000. "Estimation of water pollution sources in Lake Victoria, East Africa: application and elaboration of the rapid assessment methodology." *Journal of Environmental Management*, vol. 58, pp. 235–248.

- [14] Machiwa, P. K., 2003. "Water quality management and sustainability: the experience of lake victoria environmental management project (LVEMP)—Tanzania." *Physics and Chemistry of the Earth, Parts A/B/C*, vol. 28, pp. 1111–1115.
- [15] Banadda, E. N., Kansiime, F., Kigobe, M., Kizza, M., and Nhapi, I., 2009. *Landuse-based nonpoint source pollution: a threat to water quality in Murchison Bay* vol. 11. Uganda. Water Policy, pp. 93–104.
- [16] Tamatamah, R. A., Hecky, R. E., and Duthie, H., 2005. "The atmospheric deposition of phosphorus in Lake Victoria (East Africa)." *Biogeochemistry*, vol. 73, pp. 325–344. Available: <http://www.pecad.fas.usda.gov/lakes/images/lake0314.TPJO.2.txt>
- [17] Cózar, A., Bergamino, N., Mazzuoli, S., Azza, N., Bracchini, L., and Dattilo, A., 2007. "Relationships between wetland ecotones and inshore water quality in the Ugandan coast of Lake Victoria." *Wetlands Ecology and Management*, vol. 15, pp. 499–507.
- [18] Haande, S., Rohrlack, T., Semyalo, R. P., Brettum, P., Edvardsen, B., and Lyche-Solheim, A., 2011. "Phytoplankton dynamics and cyanobacterial dominance in Murchison Bay of Lake Victoria (Uganda) in relation to environmental conditions." *Limnologica - Ecology and Management of Inland Waters*, vol. 41, pp. 20–29.
- [19] Bracchini, L., Loiselle, S. A., Tognazzi, A., Dattilo, A. M., Focardi, S., and Cózar, A., 2007. "The optical qualities of shallow wetland lined bays in Lake Victoria." *Wetl. Ecol. Manag.*, vol. 15, pp. 509–519.
- [20] Ssebiyonga, N., Erga, S. R., Hamre, B., Starnes, J. J., and Frette, Ø., 2013. "Light conditions and photosynthetic efficiency of phytoplankton in Murchison Bay, Lake Victoria, Uganda." *Limnologica-Ecology and Management of Inland Waters*, vol. 43, pp. 185–193.
- [21] Gikuma-Njuru, P. and Hecky, R., 2005. "Nutrient concentrations in Nyanza Gulf, Lake Victoria, Kenya: light limits algal demand and abundance." *Hydrobiologia*, vol. 534, pp. 131–140.
- [22] Akurut, M., Niwagaba, C. B., Niwagaba, and Willems, P., 2017. "Long-term variations of water quality in the inner Murchison Bay." *Lake Victoria Environ. Monit. Assess*, vol. 189, p. 22.
- [23] Akurut, M., Willems, P., and Niwagaba, C. B., 2014b. *Assessing the influence of lake victoria flux on the inner murchison bay water quality*. In c. Brebbia (ed.), *water pollution XII* vol. 182. Algarve, Portugal: WIT Transactions on Ecology and The Environment, WIT Press.
- [24] Singh, N., Nagpal, G., Agrawal, S., and Rachina, 2018. "Water purification by using various adsorbents: A review." *Environmental Technology and Innovation*, vol. 11, pp. 187–240. Available: <http://doi.org/10.1616/j.eti.2018.05.006>
- [25] Yarahmadi, M., Hossieni, M., Bina, B., Mahmoudian, M. H., Naimabadie, A., and Shahsavani, A., 2009. "Application of moringaoleifer seed extract and polyaluminium chloride in water treatment." *World Applied Sciences Journal*, vol. 7, pp. 962–967.
- [26] Abd-Allah, S. M. and Gaber, H. M., 2004. "Monitoring of pesticide residues in different sources of drinking water in some rural areas." *Alexandria J. Agric. Res.*, vol. 49, pp. 112–114.
- [27] Ali, S. M., Khalid, A. R., and Majid, R. M., 2014. "The removal of Zinc, Chromium and Nickel from industrial waste water using." *Corn Cobs*, vol. 55, pp. 123–131.
- [28] Lenore, S. C., Andrew, D. E., and Eugene, W. R., 2005. *Standard methods for examination of water and wastewater method 5210b*. Washington, DC: American Public Health Association, American Water Works Association, and the Water Environment Association.
- [29] American Public Health Association, 2003. *Standard methods for the examination of water and waste water*. 20th ed. Method 4500 E.
- [30] Lyddy-Meaney, A. J., Ellis, P. S., Worsfold, P. J., Butlercv, and Mckelvie, I. D., 2000. "A compact flow injection analysis system for surface mapping of phosphate in marine waters." *Talanta*, vol. 58, pp. 1043–1053.
- [31] Zhang, J. and Chi, J., 2002. "Automated analysis of nanomolar concentrations of phosphate in natural waters with liquid waveguide environ." *Sci. Technol.*, vol. 36, pp. 1048–1053.
- [32] Swamy, A., Terer Erick Kipnetich, Magut, H., and T, 2013. "Codex (USA): Ijplcp." *Int. J. of Pharm. and Life Sci. I. J. P. L. S.*, vol. 4, pp. 2828–2833.
- [33] American Public Health Association, 1995. *Standard methods for analysis of water and wastewater*. 18th ed. Port City Press, Baltimore, M D.
- [34] Egemen, Ö., 2000. *Environment and water pollution*. Turkey: Ege University, Faculty of Fisheries. Zmir. p. 120.
- [35] Razman, A. R., Tajudin, M. H., Ooi, L. H., and Tang, M. K., 1999. *Fertilizer requirement and practical of the plantation industry in Malaysia*. Felra Agricultural Services.
- [36] Kerr, P. F., 1952. "Formation and occurrence of clay minerals." *Clays and Clay Minerals*, vol. 1, pp. 19–32.
- [37] Gates, K., 2002. "Mineralogy of bentonites." *Clays and Clay Miner*, vol. 50, pp. 223–239.
- [38] Bain, C. D. and Nadeau, P. H., 1986. "Compositions of some smectites and diagenetic illitic clays and implications for their origin." *Clays and Clay Minerals*, vol. 34, pp. 455–464.
- [39] Murray, H. H., 2007. *Applied clay mineralogy: Occurrences, processing and application of kaolins, bentonites, palygorskite-sepiolite, and common clays*. Elsevier, Amsterdam.
- [40] Kul, A. R. and Koyuncu, H., 2010. "Adsorption of Pb(II) ions from aqueous solution by native and activated bentonite: kinetic, equilibrium and thermodynamic study." *J. Hazard. Mater.*, vol. 179, pp. 332–339.

- [41] Dos Santos, V. C. G., Grassi, M. T., and Abate, G., 2014. "Sorption of Hg(II) by modified K10 montmorillonite: influence of pH, ionic strength and the treatment with different cations." *Geoderma*, pp. 129-136. Available: <https://DOI.10.1016/j.geoderma.2014.08.018>
- [42] Rozic, M., Stefanovic, S. C., Kurajica, S., Vancina, V., and Hodzig, E., 2000. "Ammoniacal nitrogen removal from water by treatment with clays and zeolites." *Water Res.*, vol. 34, pp. 3675–3681.
- [43] Bedeleian, H., Maecaneanu, A., Burca, S., and Stanca, M., 2010. "Romanian zeolitic volcanic tuffs and bentonites used to remove ammonium ions from wastewaters." *Hellenic J. Geosci.*, vol. 45, pp. 23-32.
- [44] Zhang, X., Lv, G., Liao, L., He, M., Li, Z., and Wang, M., 2012. "Removal of low concentrations of ammonium and humic acid from simulated groundwater by vermiculite/palygorskite mixture." *Water Environ. Res.*, vol. 84, pp. 682–688.
- [45] Zhao, Y., Yang, Y., Yang, S., Wang, Q., Feng, C., and Zhang, Z., 2013. "Adsorption of high ammonium nitrogen from wastewater using a novel ceramic adsorbent and the evaluation of the ammonium-adsorbed-ceramic as fertilizer." *J. Colloid Interface Sci.*, vol. 393, pp. 264–270.
- [46] Zamparas, M., Drosos, M., Geogiou, Y., Deligiannakis, Y., and Zacharias, I., 2013. "A novel bentonite-humic acid composite material Bephos™ for removal of phosphate and ammonium from eutrophic waters." *Chem. Eng. J.*, vol. 225, pp. 43–51.
- [47] Srinivasan, R., 2011. *Advances in application of natural clay and its composites in removal of biological, organic, and inorganic contaminants from drinking water*. Hindawi Publishing Corporation, p. 17.
- [48] Tanabe, K., 1981. *Solid acid and base catalysis*, in *catalysis—science and technology*, J. R. Anderson and M. Boudart. New York, NY, USA: Springer. p. 231.
- [49] vanOlphen, H., 1977. *An introduction to clay colloid Chemistry*. 2nd ed. New York, NY, USA: WileyInterscience.
- [50] Bhattacharyya, K. G. and SenGupta, S. S., 2008. "Adsorption of a few heavy metals on natural and modified kaolinite and montmorillonite: a review." *Advances in Colloid and Interface Science*, vol. 140, pp. 114–131.
- [51] Abdur, R., Zafor, M. A., and Rahman, M., 2013. "Surface water quality and risk assessment in the vicinity of Sylhet City." *International Journal of Water Resources and Environmental Engineering*, vol. 5, pp. 29-34.
- [52] Al-Zahrani, A. A., Al-Shahrani, S. S., and Al-Tawil, Y. A., 2000. "Study on the activation of Saudi bentonite, part II: characterization of the produced active clay and its test as an adsorbing agent." *J. King Saud Univ. Eng. Sci.*, vol. 13, pp. 193–203.
- [53] Christidis, Scott, P. W., and Marcolopoulos, T., 1995. "Origin of bentonite deposits of Eastern Milos Islands, Greece: Geological, chemical and geochemical evidence." *Clays and Clay Miner.*, vol. 43, pp. 63-77.
- [54] Volzone, C., Foletto, F. L., and Porto, L. M., 2003. "Performance of an Argentinian acid-activated bentonite in the bleaching of soybean oil." *Braz. J. Chem. Eng.*, vol. 20, pp. 123-126.
- [55] Christidis and Dunham, A. C., 1993. "Composition variations in smectites of Milos Island." *Greece. Clay Miner.*, vol. 28, pp. 255-257.
- [56] Mukasa-Tebandeke, I. Z., Ssebuwufu, P. J. M., Nyanzi, S. A., Schumann, A., Nyakairu, G. W. A., Ntale, M., and Lugolobi, F., 2015. "The elemental, mineralogical, ir, dta and xrd analyses characterized clays and clay minerals of central and eastern Uganda." *Advances in Materials Physics and Chemistry*, vol. 5, pp. 67-86. Available: <http://dx.doi.org/10.4236/ampc.2015.52010>
- [57] Al-Bastaki, N. and Banat, F., 2004. "Combining ultrafiltration and adsorption on bentonite in a one-step process for the treatment of colored waters." *J. Resources, Conservation and Recycling*, vol. 31, pp. 103-113.
- [58] Zhu, J., Cozzolino, V., Pigna, M., Huang, Q., Caporale, A. G., and Violante, A., 2011. "Sorption of cu, pb and cr on na-montmorillonite: Competition and effect of major elements." *Chemosphere*, vol. 84, pp. 484-489.
- [59] Chartterjee, T., Chartterjee, S., and HanWoo, S., 2009. "Enhanced coagulation of bentonite particles in water by a modified chitosan biopolymer." *Chemical Engineering Journal*, vol. 148, pp. 414-419.
- [60] Tahir, S. S. and Rauf, N., 2004. "Removal of Fe (II) from the wastewater of a galvanized pipe manufacturing industry by adsorption onto bentonite clay." *Journal of Engineering Management*, vol. 73, pp. 285-292.
- [61] Hecky and Bugenyi, F. W. B., 1992. "Hydrology and chemistry of the African great lakes and water-quality issues: problems and solutions." *Mitt IntVer Theor Angew Limnol*, vol. 23, pp. 45-54.
- [62] Mainstone, C. P. and Parr, W., 2002. "Phosphorus in rivers - ecology and management." *Sci. Tot. Environ.*, pp. 25-47.
- [63] Luyiga, S., Haande, S., Semyalo, R. P., Kizito, Y. S., Miyingo-Kezimbira, A., and Brettum, P., 2015. "How water exchange and seasonality affect the eutrophication of Murchison Bay, Lake Victoria." *Limnological-Ecology and Management of Inland Waters*, vol. 53, pp. 60 –73.
- [64] Bradford, S. and Torkzaban, S., 2008. "Colloid transport and retention in unsaturated porous media: A review of interface-, collector-, and pore-scale processes and models." *Vadose Zone Journal*, vol. 7, pp. 667-681.
- [65] deZwart, A. H., de Boer, J., Vafei, A., Schotting, R. J., and Hassanizadeh, S. M., 2006. "Experimental investigation of clogging processes in sandy aquifers near water supply wells." Available:

https://pdfs.semanticscholar.org/5dd3/4c49e756ffabd912fd4e816c7780382ee48d.pdf?_ga=2.158486586.1017430295.1574226009-1673424798.1574226009

- [66] Ramachandran, V. and Fogler, H. S., 1999. "Plugging by hydrodynamic bridging during flow of stable colloidal particles within cylindrical pores." *J. Fluid. Mech.*, vol. 385, pp. 129 –156. Available: <https://doi.org/10.1017/S0022112098004121>
- [67] Sen, T. K. and Khilar, K. C., 2006. "Review on subsurface colloids and colloid-associated contaminant transport in saturated porous media." *Advances in Colloid and Interface Science*, vol. 119, pp. 71-96.